

Ultra Super Fast Recovery Diodes


UF2AA~UF2MA
DO-214AC(SMA)

Features

- ◆ Glass Passivated Die Construction
- ◆ Ultra-Fast Recovery Time for High Efficiency
- ◆ Surge Overload Rating to 50A Peak
- ◆ High Current Capability
- ◆ Ideally Suited for Automated Assembly
- ◆ Lead Free Finish/RoHS Compliant.

Mechanical Date

- ◆ Case: SMA
- ◆ Case Material: Molded Plastic UL Flammability Classification Rating 94V-0
- ◆ Moisture Sensitivity: Level 1 per J-STD-020C
- ◆ Terminals: Lead Free Plating (Matte Tin Finish) Solderable per MIL-STD-202, Method 208
- ◆ Polarity: Cathode Band or Cathode Notch
- ◆ Weight: 0.063 grams (approximate)

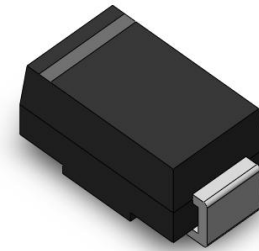DO-214AC(SMA)


Maximum Ratings and Electrical Characteristics (T_A = 25°C unless otherwise specified)

Single phase, half-wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Ratings		Symbol	UF2AA	UF2BA	UF2DA	UF2GA	UF2JA	UF2KA	UF2MA	Unit
Peak Repetitive Reverse Voltage		V _{RRM}								
Working Peak Reverse Voltage		V _{RWM}	50	100	200	400	600	800	1000	V
DC Blocking Voltage (Note 4)		V _R								
RMS Reverse Voltage		V _{R(RMS)}	35	70	140	280	420	560	700	V
Average Rectified Output Current @ T _T = 75°C		I _O	2.0							A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave Superimposed on Rated Load		I _{FSM}	50							A
Forward Voltage Drop @ I _F = 1.0A		V _{FM}	1.0			1.3	1.7			V
Peak Reverse Current at Rated DC Blocking Voltage (Note 4)	@ T _A = 25°C	I _{RM}	5							μA
	@ T _A = 100°C		100							
Reverse Recovery Time (Note 1)		t _{rr}	50				75			ns
Typical Total Capacitance (Note 2)		C _T	20				10			pF
Typical Thermal Resistance, Junction to Terminal		R _{θJT}	30							°C/W
Operating and Storage Temperature Range		T _J , T _{STG}	-65 to +150							°C

- Notes: 1. Measured with I_F = 0.5A, I_R = 1.0A, I_{rr} = 0.25A. See figure 5.
 2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
 3. Unit mounted on PC board with 5.0 mm² (0.013 mm thick) copper pad as heat sink.
 4. Short duration pulse test used to minimize self-heating effect.

Ultra Super Fast Recovery Diodes

UF2AA~UF2MA

DO-214AC(SMA)

Rating and Characteristic Curves

Fig1. Forward Current Derating Curve

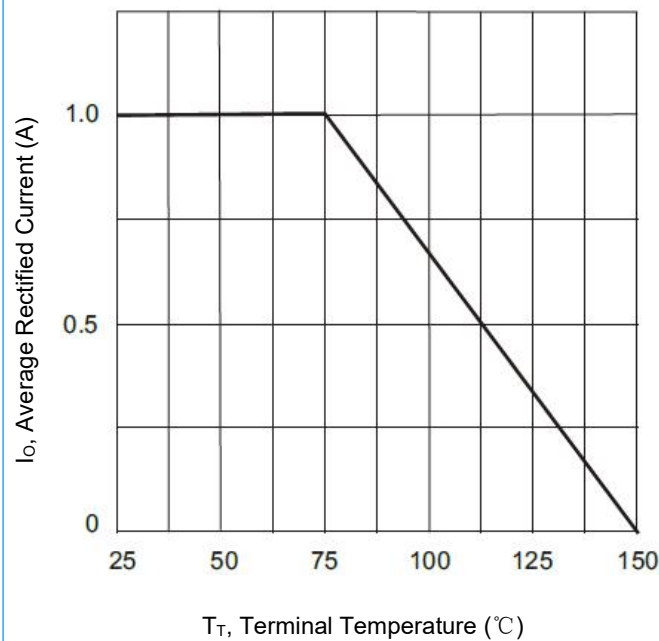


Fig2. Typical Forward Characteristics

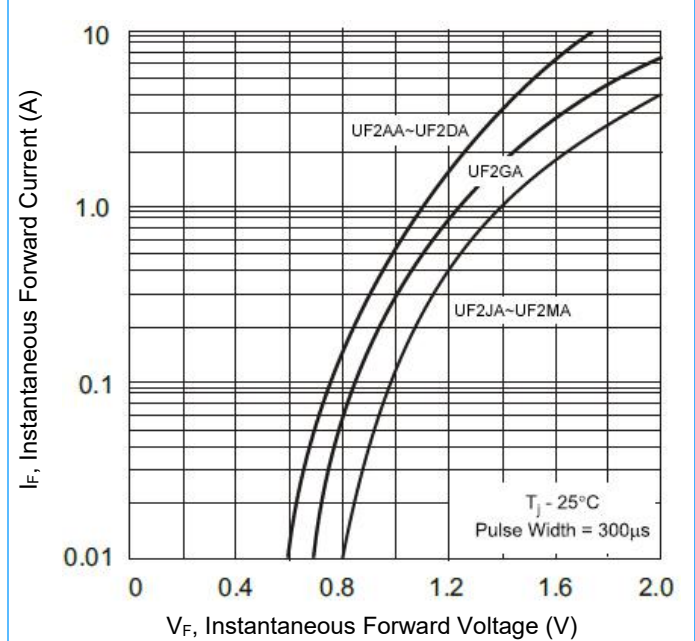


Fig3. Forward Surge Current Derating Curve


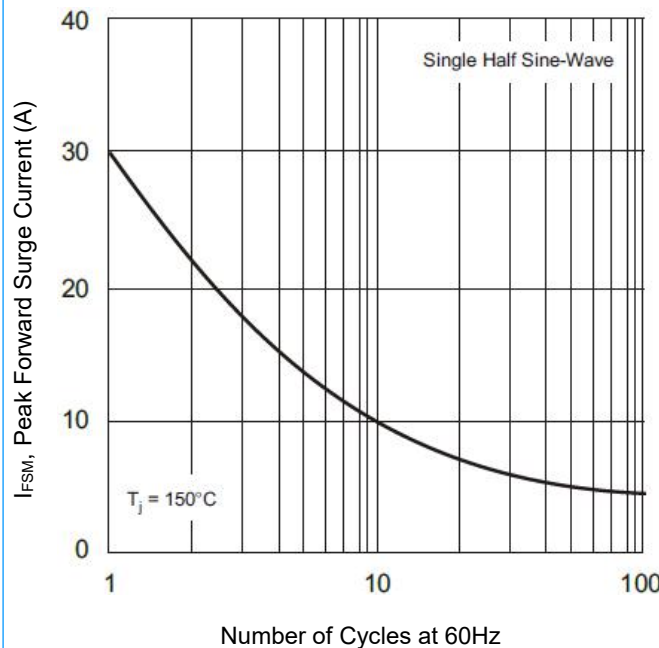



Fig4. Maximum Forward Surge Current

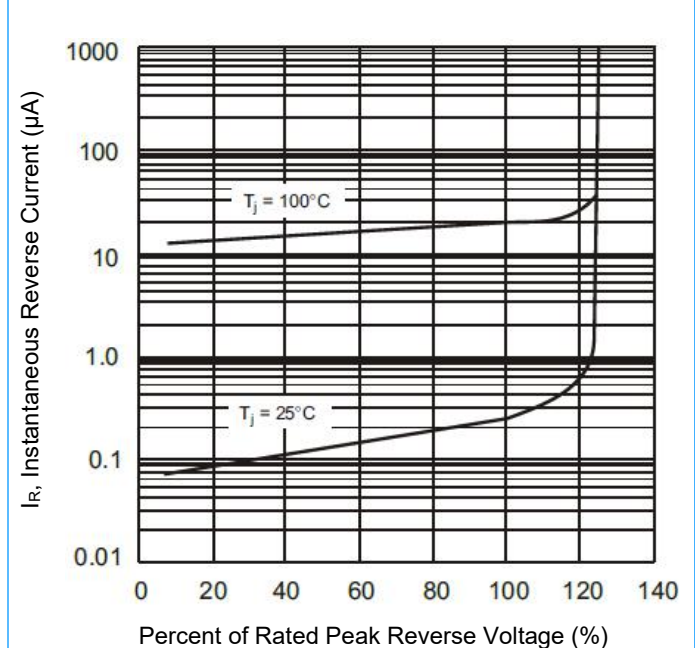

Ultra Super Fast Recovery Diodes

UF2AA~UF2MA
DO-214AC(SMA)

Rating and Characteristic Curves (Continue)

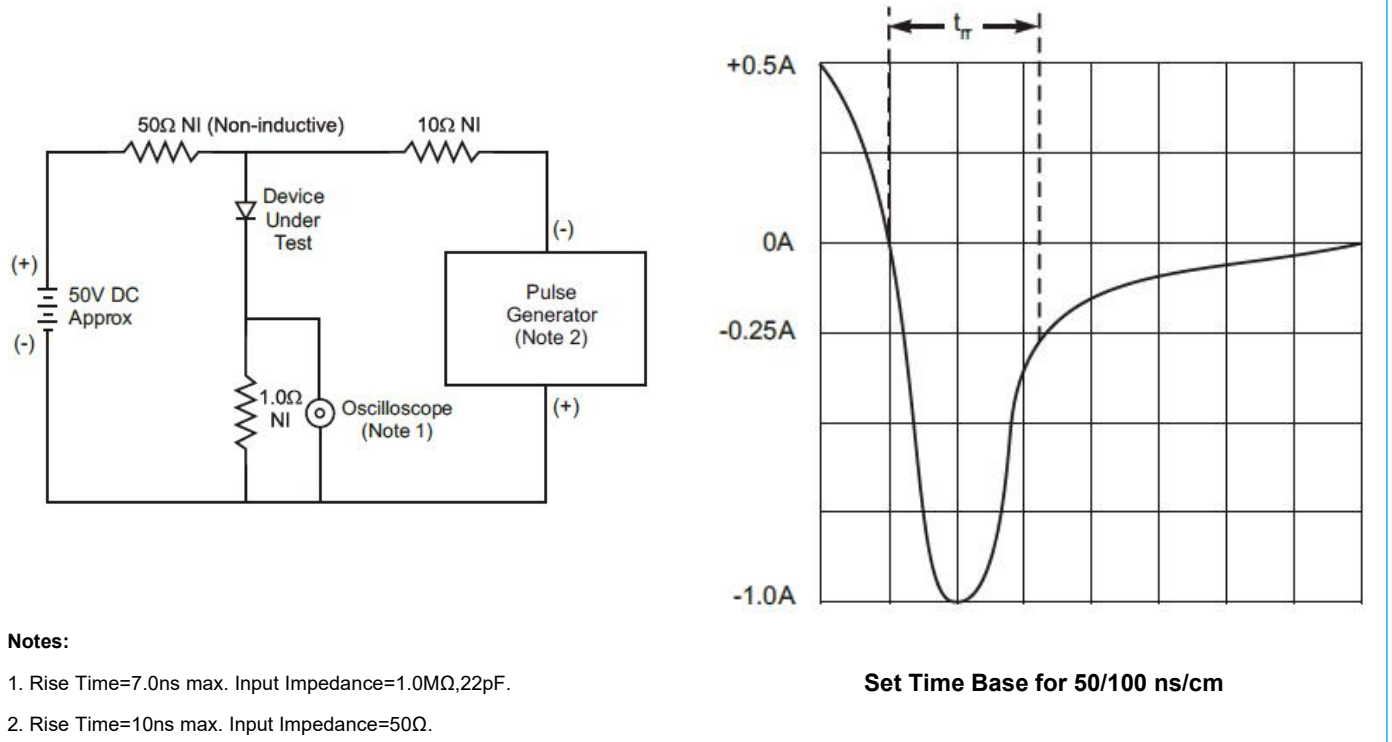
Fig5. Reverse Recovery Time Characteristic and Test Circuit


Ultra Super Fast Recovery Diodes

UF2AA~UF2MA
DO-214AC(SMA)


Package Outline (Unit: mm)

DO-214AC(SMA)

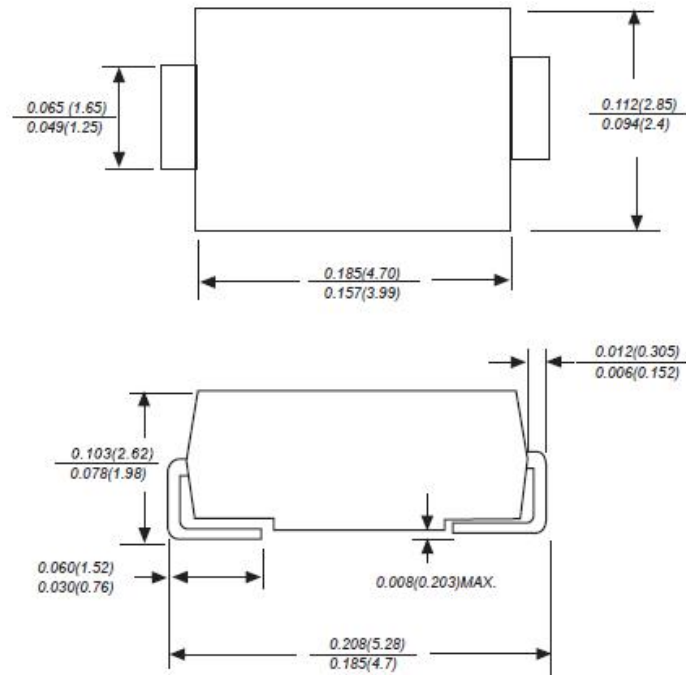

Dimensions in inches (millimeters)

Tape and Reel Specification

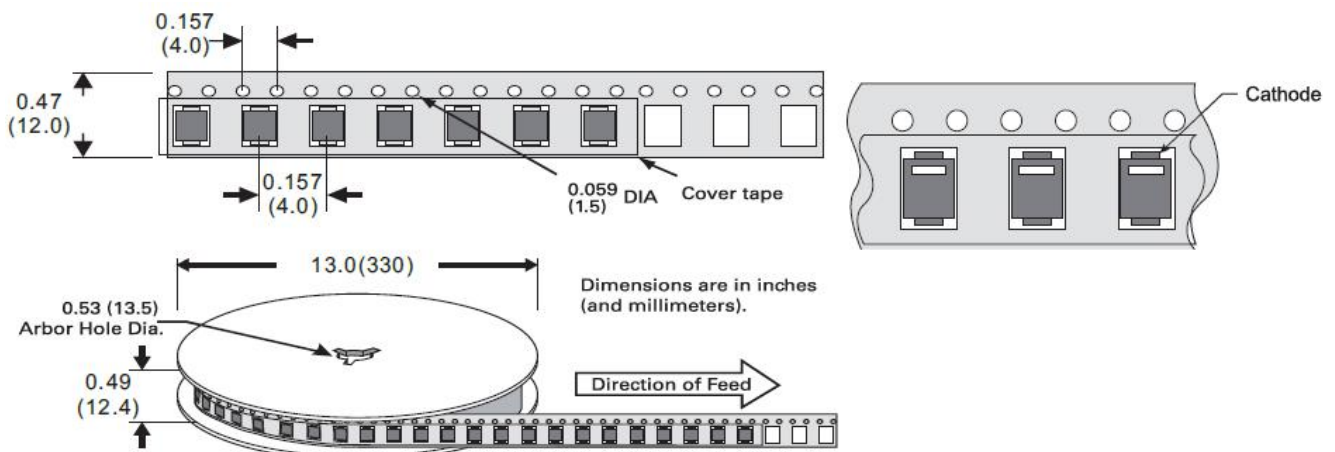

Ultra Super Fast Recovery Diodes

UF2AA~UF2MA

DO-214AC(SMA)

Packaging Information

Part Number	Component Package	Quantity
UF2AA~UF2MA	DO-214AC(SMA)	5000 PCS/REEL

Warning



- ◆ SOCAY owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property.
- ◆ SOCAY reserves the right to make changes without further notice to any products herein.
- ◆ SOCAY makes no warranties, representations or warranties as to the fitness of its products for any particular purpose, and disclaims any liability.
- ◆ The parameters provided in the SOCAY datasheet specification may vary from application to application, and the actual performance may vary over time. All operating parameters must be verified by the customer's technical expert before application.
- ◆ Any and all responsibilities and liabilities are disclaimed if any item under this notice of warning is not complied with.